

Vergi No. 0080818425

Agha Pack Since 1989

معدات معالجة وتعليب التمور
Dates processing machines

Makina Gıda Sanayi Ve Ticaret Limited Şirketi

Gaziantep, Sam mahallesi 43 Nolu Sokak No. 3/A Şehitkamil, Turkey
United State Of America, 4445 East gate mall, Suit 200 San Diego, CA 92121

www.aghapack.com



وحدة تصنيع دبس التمر - The manufacturing unit dates molasses

1. قسم التفطيش والغسيل والتعقيم والتشيف (دبس التمر)

المواصفات الفنية لوحدة تصنيع دبس التمر AP10-250

هو عبارة عن مجموعة آليات تشكل خط متكامل لتصنيع مادة دبس التمر، وضمن مراحل عمل تسلسلي يدوي وآلي وبواسطة وحدة تحكم رقمية مبرمجة تعمل على تكييف وحدات العمل ضمن أفضل الشروط، وقد استخدم معدن الستانلس الستيل 304 العالي الجودة في تصنيع معظم مكونات الخط، إلا من بعض الأجزاء التي يتطلب تصنيعها من معدن الحديد المعالج واللدائن.



A. مرحلة المعالجة والتنظيف (مبرمج مع لوحة التحكم الرئيسية)

الأبعاد	الطول 596 سم x العرض الإجمالي 80 سم x الارتفاع 150 سم.
المعدن	ستانلس ستيل عالي الجودة من نوعية 304.
الناقل	شبكة معدني موديل AP70C
المحرك	2.5 حصان 380 فولت 3 فاز
توربين هواء	4 1 حصان لكل توربين.
المضخات	3 375 وات لكل مضخة (مضخة الماء والكلور - مضخة ماء فقط - مضخة ماء وجلوكوز).

2. قسم تصنيع دبس التمر



B. سير ناقل جلدي لا يلصق مع حاضنات تمنع تساقط التمور أثناء الرفع ومزود بحوض استقبال معدني.
(مبرمج مع لوحة التحكم الرئيسية)

الأبعاد	الطول 275 سم x العرض 40 سم x الارتفاع 160 سم.
المعدن	جوانب السير ستانلس ستيل عالي الجودة من نوعية 304 .
الناقل	سير ناقل جلدي مع حاضنات تمنع تساقط التمور.
حوض استقبال	الطول 85 سم x العرض 40 سم x الارتفاع 40 سم.
المحرك (1)	بقوة 1 حصان 380 فولت 50 سيكل
C. مرحلة السلق وهي عبارة عن حجرة محكمة الإغلاق تحتوي على سير ناقل متعدد الطبقات وفوهات ضخ بخار الماء الحار. (مبرمج مع لوحة التحكم الرئيسية)	

Türkiye İş Bankası

Branch: Cumhuriyet / Gaziantep

Account Name: Agha Pack

Swift Code: ISBKTRIS

Account No.: TL. 6318-0034370 (IBAN: TR22 0006 4000 0016 3180 0343 70)

\$. 6318-0004432 (IBAN: TR09 0006 4000 0026 3180 0044 32)

€. 6318-0004446 (IBAN: TR19 0006 4000 0026 3180 0044 46)


Head office: United state of America, Email: info@aghapack.com

Regional office: Gaziantep - Türkiye, Email: mo.tr@aghapack.com

Sales office: Istanbul - Türkiye, Email: sales@aghapack.com

Factory: Gaziantep - Türkiye, Email: mo@aghapack.com

Sales GSM: 0090 553 733 3728 Factory GSM: 0090 537 286 9818



Agha Pack

Since 1989

معدات معالجة وتعليب التمور
Dates processing machines

Makina Gıda Sanayi Ve Ticaret Limited Şirketi
Gaziantep, Sam mahallesi 43 Nolu Sokak No. 3/A Şehitkamil, Turkey
United State Of America, 4445 East gate mall, Suit 200 San Diego, CA 92121
www.aghapack.com



Vergi No. 0080818425

	أبعاد الحجره	الطول 200 سم x العرض 80 سم x الارتفاع 155 سم. (عدا قواعد التثبيت)
	أبعاد الناقل	الطول الإجمالي 5.5 متر x العرض 50 سم
	الناقل	شبيكي معدني موديل AP70C
	المعدن	ستانلس ستيل عالي الجودة من نوعية 304 . لجميع أجزاء الحجره بما فيها مواسير البخار الداخلية.
	المحركات (3)	بقوة 1 حصان 380 فولت 50 سيكل ، لكل منهما
	D.	سير ناقل جلدي لا يلصق مع حاضنات تمنع تساقط التمور أثناء الرفع ومزود بحوض استقبال معدني. (مبرمج مع لوحة التحكم الرئيسية)
	الأبعاد	الطول 350 سم x العرض 40 سم x الارتفاع 199 سم.
	المعدن	جوانب السير ستانلس ستيل عالي الجودة من نوعية 304 .
	الناقل	سير ناقل جلدي مع حاضنات تمنع تساقط التمور.
	حوض استقبال	الطول 57.5 سم x العرض 40 سم x الارتفاع 26 سم.
	المحرك (1)	بقوة 2 حصان 380 فولت 50 سيكل
	E.	مرحلة عزل القشور والبذور، وهذه المرحلة تعمل على استخلاص المادة السكرية من التمور وتعتبر من أهم المراحل في خطوات تصنيع مادة دبس التمر. (مبرمجة مع لوحة التحكم الرئيسية)
	الأبعاد	الطول 131 سم x العرض 75 سم x الارتفاع 151 سم.
	المعدن	ستانلس ستيل عالي الجودة من نوعية 304 . لجميع أجزاء الآلة
	حزنون الدفع	معدني ، أبعاد الخطوات 8 سم.
	اسطوانة العزل	معدنية على شكل مصفاة ذات تقو بقطر 4 مم. قطر 40 سم x 35 سم
	اللافظ	معدني على سير ناقل جلدي 150 سم x 50 سم لا يلصق يعمل على إخراج المخلفات.
	محرك الدفع (1)	بقوة 1 حصان 380 فولت 50 سيكل
	محرك العزل (1)	بقوة 10 حصان 380 فولت 50 سيكل 700 دورة
	محرك اللفظ (1)	بقوة 1/2 حصان 380 فولت 50 سيكل
	F.	سير ناقل جلدي قابل للصلق. (مبرمج مع لوحة التحكم الرئيسية)
	الأبعاد	الطول 300 سم x العرض 40 سم x الارتفاع 199 سم.
	المعدن	جوانب السير ستانلس ستيل عالي الجودة من نوعية 304 .
	الناقل	سير ناقل جلدي قابل للصلق لتثبيت خلاصة التمر حين الرفع لمرحلة الخلط و التجانس.
	المحرك (1)	بقوة 2 حصان 380 فولت 50 سيكل
	G.	مرحلة الخلط والتجانس بالماء الحار وهي عبارة عن اسطوانة بسماكة 4 مم مزودة برفاس يعمل على خلط السائل وإذابة السكر في الماء. (مبرمجة مع لوحة التحكم الرئيسية)

Türkiye İş Bankası

Branch: Cumhuriyet / Gaziantep

Account Name: Agha Pack

Swift Code: ISBKTRIS

Account No.: TL 6318-0034370 (IBAN: TR22 0006 4000 0016 3180 0343 70)

\$. 6318-0004432 (IBAN: TR09 0006 4000 0026 3180 0044 32)

€. 6318-0004446 (IBAN: TR19 0006 4000 0026 3180 0044 46)


Head office: United state of America, Email: info@aghapack.com

Regional office: Gaziantep - Türkiye, Email: mo.tr@aghapack.com

Sales office: Istanbul - Türkiye, Email: sales@aghapack.com

Factory: Gaziantep - Türkiye, Email: mo@aghapack.com

Sales GSM: 0090 553 733 3728 Factory GSM: 0090 537 286 9818



Vergi No. 0080818425

Agha Pack Since 1989

معدات معالجة وتعليب التمور
Dates processing machines

Makina Gıda Sanayi Ve Ticaret Limited Şirketi
Gaziantep, Sam mahallesi 43 Nolu Sokak No. 3/A Şehitkamil, Turkey
United State Of America, 4445 East gate mall, Suit 200 San Diego, CA 92121

www.aghapack.com



القطر 110 سم x الارتفاع 160 سم، الارتفاع الإجمالي 177 سم.(عدا المحرك وقواعد التثبيت)	الأبعاد
ستانلس ستيل عالي الجودة من نوعية 304 .	المعدن
معدني مزود بشفرات ومبذل تجانس لأجزاء الأسطوانة.	الرفاس
مدخل للبخار 1 أنش يعمل على تسخين السائل أثناء الخلط والإذابة.	بخار التسخين
الحرارة وكمية الماء.	حساس (2)
بقوة 3/4 حصان لإضافة ماء.	المضخات (1)
بقوة 5 حصان 380 فولت 50 سيكل 70 دورة بالدقيقة	المحرك (1)
	H. مرحلة التصفية وعزل الألياف عن السائل السكري بواسطة جهاز التصفية بمبدأ الكبس. (مبرمجة مع لوحة التحكم الرئيسية).
الطول 174 سم x العرض 40 سم x الارتفاع 75 سم.	الأبعاد
لدائن للعصير والألياف بينما باقي الأجزاء من الحديد المعالج.	المعدن
عدد 27 مزودة بخلايا تصفية 200 ميكرون. قياس اللوح الواحد 40 x 40 سم.	ألواح التصفية
بقوة 7.5 حصان 12 بار لسحب السائل من وحدة الخلط وضخه في وحدة التصفية.	المضخة (1)
بقوة 25 بار يعمل بضغط الزيت لتثبيت ألواح التصفية ومنعها من التراجع وتسريب السائل أثناء الحقن.	طاغط بستون
مصنوع من الستانلس ومخصص لتجميع العصير المصفي.	حوض العصير
	A. مرحلة التكتيف والطبخ بواسطة بخار الماء وتتم هذه المرحلة بواسطة اسطوانة مزدوجة قادرة على تحمل الضغط لضبط درجة حرارة الغليان والذي يتم بواسطة بخار الماء المضغوط، والأسطوانة مصنوعة من معدن الستانلس بسماكة 5 مم. (مبرمجة مع لوحة التحكم الرئيسية).
خارجي قطر 120 ارتفاع 130 ، داخلي قطر 100 ارتفاع 125 سم.	الأبعاد
ستانلس ستيل عالي الجودة من نوعية 304 .	المعدن
1 أنش ستانلس ستيل عالي الجودة من نوعية 304 . لتنظيف الأسطوانة بعد الانتهاء من التركيز و التعبئة.	فوهة ماء
2 لدخول البخار 1.5 أنش ، 1 لخروج البخار 1.5 أنش.	فوهات بخار (3)
1.5 أنش لدخول السائل قبل التركيز والثاني لخروج الدبس بعد التركيز.	فوهة سائل (2)
1- للحرارة - 1- لقياس البار المنخفض 1- لقياس البار المرتفع 2- صمام أمان.	حساسات (5)

Türkiye İş Bankası

Branch: Cumhuriyet / Gaziantep

Account Name: Agha Pack

Swift Code: ISBKTRIS

Account No.: TL. 6318-0034370 (IBAN: TR22 0006 4000 0016 3180 0343 70)

\$. 6318-0004432 (IBAN: TR09 0006 4000 0026 3180 0044 32)

€. 6318-0004446 (IBAN: TR19 0006 4000 0026 3180 0044 46)


Head office: United state of America, Email: info@aghapack.com

Regional office: Gaziantep - Türkiye, Email: mo.tr@aghapack.com

Sales office: Istanbul - Türkiye, Email: sales@aghapack.com

Factory: Gaziantep - Türkiye, Email: mo@aghapack.com

Sales GSM: 0090 553 733 3728 Factory GSM: 0090 537 286 9818



Vergi No. 0080818425

Agha Pack Since 1989

معدات معالجة وتعليب التمور
Dates processing machines

Makina Gıda Sanayi Ve Ticaret Limited Şirketi
Gaziantep, Sam mahallesi 43 Nolu Sokak No. 3/A Şehitkamil, Turkey
United State Of America, 4445 East gate mall, Suit 200 San Diego, CA 92121
www.aghapack.com



بقوة 1/2 حصان 380 فولت 50 سيكل (لغسيل الغلاية بعد نهاية العمل).	مضخة ماء (1)
مضخة خاصة بشفط الهواء (خلخلة) بقوة 7.5 حصان 380 فولت 50 سيكل	مضخة شفط (1)
مضخة توربينية خاصة لشفط البخار بقوة 2 حصان 380 فولت 50 سيكل	مضخة شفط (1)
مضخة خاصة لسحب الدبس بقوة 2 حصان 380 فولت 50 سيكل	مضخة شفط (1)
حنفية ستانلس ستيل 1/4 أنش لأخذ عينة.	مأخذ عينة
معدني مزود بشفرات وميدل تجانس لأجزاء الأسطوانة.	الرفاس
بقوة 5 حصان 380 فولت 50 سيكل 70 دورة بالدقيقة	المحرك (1)
J. خزان مزدوج لتجميع الدبس والمحافظة على سخونته حتى الانتهاء من التعبئة (ميرمجة مع لوحة التحكم الرئيسية).	
الطول 100 سم x العرض 100 سم x الارتفاع 100 سم.	الهيكل
ستانلس ستيل عالي الجودة من نوعية 304 .	المعدن
خارجي قطر 80 ارتفاع 110 ، داخلي قطر 70 ارتفاع 105 سم.	أبعاد الخزان
1 أنش ستانلس ستيل عالي الجودة من نوعية 304 . لتنظيف الخزان بعد الانتهاء من التعبئة.	فوهة ماء
لدخول البخار 1 أنش ، لخروج البخار 1 أنش.	فوهات بخار (2)
1 أنش لدخول السائل بعد التركيز والثاني 1 أنش لخروج الدبس نحو آليات التعبئة.	فوهة سائل (2)
لقياس البار المرتفع 2- صمام أمان.	حساسات (3)
K. مرحلة التعبئة النصف يدوية ، مثالية لتعبئة المواد السائلة الغذائية مصنوعة بالكامل من معدن الستانلس ستيل (304). تتميز الآلة بقدرة عالية على الإغلاق المباشر بعد الانتهاء من عملية حقن المنتج دون السماح لتسريب أي نقطة من مواد التعبئة بواسطة صمامات عالية الجودة ، تتميز الآلة بتعبئة كل المواد السائلة ذات القوام المنخفض أو العالي ، تم تصميم الآلة على مبدأ الحقن بضغط الهواء مع تحكم رقمي لكمية المنتج. (مرحلة غير متصلة بلوحة التحكم الرئيسية).	
الطول 100 x العرض 50 x الارتفاع 60 سم. (عدا قواعد التثبيت)	الأبعاد
2 عبوات / بالدقيقة . لكل آلة.	سرعة التعبئة
تحكم يدوي حتى 1 كيلو غرام.	حجم التعبئة
2 (اثنان فقط).	عدد الآليات
2 لكل آلة (إجمالي عدد المآخذ 4)	عدد المآخذ
متممات الخط اللازمة في تصنيع مادة الدبس	
1. وحدة التحكم الآلي بالخط .	
2. مخبر دائم لتحديد الكثافة المطلوبة لمادة الدبس بالإضافة لمراقبة الجودة والتنوعية .	
3. غلاية لتوليد البخار بطاقة نصف طن بالساعة درجة حرارة 110 مئوية ضغط 4 بار	
(بند 2 و 3 يتم توفيره من قبل العميل وليس الشركة الموردة)	

Türkiye İş Bankası

Branch: Cumhuriyet / Gaziantep

Account Name: Agha Pack

Swift Code: ISBKTRIS

Account No.: TL. 6318-0034370 (IBAN: TR22 0006 4000 0016 3180 0343 70)

\$. 6318-0004432 (IBAN: TR09 0006 4000 0026 3180 0044 32)

€. 6318-0004446 (IBAN: TR19 0006 4000 0026 3180 0044 46)


Head office: United state of America, Email: info@aghapack.com

Regional office: Gaziantep - Türkiye, Email: mo.tr@aghapack.com

Sales office: Istanbul - Türkiye, Email: sales@aghapack.com

Factory: Gaziantep - Türkiye, Email: mo@aghapack.com

Sales GSM: 0090 553 733 3728 Factory GSM: 0090 537 286 9818



Vergi No. 0080818425

Agha Pack Since 1989

معدات معالجة وتعليب التمور
Dates processing machines


Makina Gıda Sanayi Ve Ticaret Limited Şirketi

Gaziantep, Sam mahallesi 43 Nolu Sokak No. 3/A Şehitkamil, Turkey
United State Of America, 4445 East gate mall, Suit 200 San Diego, CA 92121

www.aghapack.com



1. Section Inspection, washing, sterilization and drying (**Date molasses**)

Technical specifications of the manufacturing unit dates molasses AP10-250	
Is a collection machines constitute an integrated line for the manufacture of dates molasses, and within the chain of serial manual & automatic and by digital control panel, working on conditioning and work units within the best conditions, has been used metal stainless elegant furnishings 304 high-quality manufacturing of most components line, except for a few parts that require processing of iron ore processor and plastics.	
A. Stage feed, Conveyor line with the skin incubators to carry dates and transfer to a washing phase of the inspection. <i>(programmed with the main control panel)</i>	
Dimensions	Length 225 cm. x width 40 cm. x height 136 cm.
Metal	High-quality stainless-steel quality 304.
Receiving	Height 85 cm x width 40 cm x height 40 cm.
Motor (1)	1HP. 380 Volts, 50 Cycle.
B. The phase of inspections <i>(programmed with the main control panel)</i>	
Dimensions	Length 100 cm. x width x 50 cm. x height 100 cm.
Metal	High-quality stainless-steel quality 304.
Motor (1)	¾ hp. and 380 Volts, 50 Cycle.
C. Washing phase <i>(programmed with the main control panel)</i>	
1. Washing with water and chlorine in the public health recommendations. <i>(2 grams chlorine powder per 1 cubic meter of water)</i>	
2. Washing with water only to eliminate the smell of chlorine from dates.	
3. Turbine air to remove the strong water drops on the dates.	
Dimensions	Length 325 cm. x width 50 cm. x height 150 cm.
Metal	High-quality stainless-steel quality 304.
Turbine (1)	air pump strongly ½ hp 380-volt 50 Hertz
Water Pumps (3)	½ hp. Washing stages.
Pipes	High-quality stainless-steel quality 304. To spray the top and bottom.
Conveyor	The carrier with a medium altitude made of stainless steel allows the passage of water without dates.
Motor (1)	2 hp. 380 Volts.

Türkiye İş Bankası

Branch: Cumhuriyet / Gaziantep

Account Name: Agha Pack

Swift Code: ISBKTRIS

Account No.: TL. 6318-0034370 (IBAN: TR22 0006 4000 0016 3180 0343 70)

\$. 6318-0004432 (IBAN: TR09 0006 4000 0026 3180 0044 32)

€. 6318-0004446 (IBAN: TR19 0006 4000 0026 3180 0044 46)


Head office: United state of America, Email: info@aghapack.com

Regional office: Gaziantep - Türkiye, Email: mo.tr@aghapack.com

Sales office: Istanbul - Türkiye, Email: sales@aghapack.com

Factory: Gaziantep - Türkiye, Email: mo@aghapack.com

Sales GSM: 0090 553 733 3728 Factory GSM: 0090 537 286 9818



Vergi No. 0080818425

Agha Pack

Since 1989

معدات معالجة وتعليب التمور
Dates processing machines

Makina Gıda Sanayi Ve Ticaret Limited Şirketi

Gaziantep, Sam mahallesi 43 Nolu Sokak No. 3/A Şehitkamil, Turkey
United State Of America, 4445 East gate mall, Suit 200 San Diego, CA 92121

www.aghapack.com



D. Drying phase (programmed with the main control panel)

Dimensions	Length 420 cm. x width 50 cm. x height 150 cm.
Metal	High-quality stainless-steel quality 304.
Turbine (4)	375 Watt, each, and equipped with heaters, 2000 Watt, working to heat the air.
Conveyor	Metal carrier network model AP70C
Motor (1)	2 hp. 380 Volts, 50 Cycle.

2. Section manufacture dates molasses.

E. Conveyor belt, not stuck with incubators to prevent loss dates during movement.
(programmed with the main control panel)



Dimensions	Length 275 cm. x width 40 cm x height 160 cm.
Metal	High-quality stainless-steel quality 304.
Conveyor	Carrier conveyor skin with incubators to prevent loss of dates.
Reception	length 85 cm. x width 40 cm. x height 40 cm.
Motor (1)	1HP 380 Volts, 50 Cycle.

F. Closed chamber containing a multi-layered metal conveyor with steam nozzles.
(Programmed with the main control panel)

Dimensions	Length 200 cm. x width 80 cm. x height 155 cm.
Metal	Metal carrier network model AP70C
Conveyor	length of 5.5 meters x Width 50 cm.
Motor (3)	1HP. 380 Volts, 50 Cycle.

G. Conveyor belt, not stuck with incubators to prevent loss dates during movement.
(programmed with the main control panel)

Dimensions	Length 350 cm. x width 40 cm. x height 199 cm.
Metal	High-quality stainless-steel quality 304.
Conveyor	Carrier conveyor skin with incubators to prevent loss of dates.
Reception	length 57.5 cm. x width 40 cm. x height 26 cm.
Motor (1)	2 HP. 380 Volts, 50 Cycle.

Türkiye İş Bankası

Branch: Cumhuriyet / Gaziantep

Account Name: Agha Pack

Swift Code: ISBKTRIS

Account No.: TL. 6318-0034370 (IBAN: TR22 0006 4000 0016 3180 0343 70)

\$. 6318-0004432 (IBAN: TR09 0006 4000 0026 3180 0044 32)

€. 6318-0004446 (IBAN: TR19 0006 4000 0026 3180 0044 46)


Head office: United state of America, Email: info@aghapack.com

Regional office: Gaziantep - Türkiye, Email: mo.tr@aghapack.com

Sales office: Istanbul - Türkiye, Email: sales@aghapack.com

Factory: Gaziantep - Türkiye, Email: mo@aghapack.com

Sales GSM: 0090 553 733 3728 Factory GSM: 0090 537 286 9818



Vergi No. 0080818425

Agha Pack *Since 1989*

معدات معالجة وتعليب التمور
Dates processing machines

Makina Gıda Sanayi Ve Ticaret Limited Şirketi


Gaziantep, Sam mahallesi 43 Nolu Sokak No. 3/A Şehitkamil, Turkey
United State Of America, 4445 East gate mall, Suit 200 San Diego, CA 92121

www.aghapack.com



H. Separation phase to remove peels, seeds, and this stage is working to extract sugar from dates. And one of the most important stages in the manufacture of molasses.

(programmed with the main control panel)

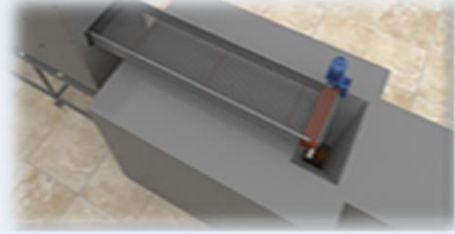

Dimensions	Length 131 cm. x width 75 cm. x height 151 cm.
Metal	High-quality stainless-steel quality 304.
Push coil	dimensions of steps 8 cm.
Cylinder	Push cylinder diameter 35 cm x Length 40 cm. holes diameter 4 mm.
Ejecting	Belt conveyor 150 cm x 50 cm.
Pushing Motor (1)	1HP 380 Volts, 50 Cycle.
Separation Motor (1)	10 hp. 380 Volts, 50 Cycle, 700 RPM.
Eject Motor (1)	½ hp and 380 Volts, 50 Cycle.

I. Belt conveyor is suitable to dates paste. *(programmed with the main control panel)*

Dimensions	Length 300 cm. x width 40 cm. x height 199 cm.
Metal	High-quality stainless-steel quality 304.
Conveyor	Suitable to uploaded dates paste to mixing and homogeneity stage.
Motor (1)	2 HP 380 Volts, 50 Cycle.

J. Mixing and homogeneity stage with hot water to dissolve dates sugar in water.
(programmed with the main control panel)




Dimensions	Diameter 110 cm. x Height 160 cm. (overall height 177 cm. except the motor)
Metal	High-quality stainless-steel quality 304. Thickness 4 mm.
Tool Stir	Equipped with metal blades to homogeneity water with dates.
Heaters	Steam heating
Sensor (1)	Heat sensor.
Pumps (1)	¾ hp to add water. ~ ¾ hp pump liquid from the mixer to filtration unit.
Motor (1)	5 hp. 380 Volts, 50 Cycle, 70 RPM.

Türkiye İş Bankası

Branch: Cumhuriyet / Gaziantep
Account Name: Agha Pack
Swift Code: ISBKTRIS
Account No.: TL. 6318-0034370 (IBAN: TR22 0006 4000 0016 3180 0343 70)
\$. 6318-0004432 (IBAN: TR09 0006 4000 0026 3180 0044 32)
€. 6318-0004446 (IBAN: TR19 0006 4000 0026 3180 0044 46)

Head office: United state of America, **Email:** info@aghapack.com
Regional office: Gaziantep - Türkiye, **Email:** mo.tr@aghapack.com
Sales office: Istanbul - Türkiye, **Email:** sales@aghapack.com
Factory: Gaziantep - Türkiye, **Email:** mo@aghapack.com
Sales GSM: 0090 553 733 3728 **Factory GSM:** 0090 537 286 9818



Vergi No. 0080818425


Agha Pack *Since 1989*

معدات معالجة وتعليب التمور
Dates processing machines


Makina Gıda Sanayi Ve Ticaret Limited Şirketi

Gaziantep, Sam mahallesi 43 Nolu Sokak No. 3/A Şehitkamil, Turkey
United State Of America, 4445 East gate mall, Suit 200 San Diego, CA 92121

www.aghapack.com



K. Liquidation phase and insulation of fiber.
(programmed with the main control panel)

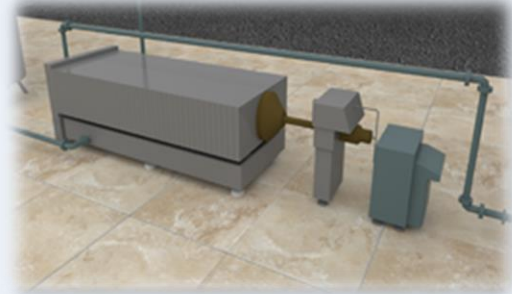

Dimensions	Length 174 cm. x width 40 cm. x height 75 cm.
Metal	Plastic in the filter section, while the remaining parts of the iron processor.
Panels	27 with 200-micron filter cells. Measuring one board 40 x 40 cm.
Pumps (1)	7.5 hp. 12 bars
Piston	25 bars.
Juice Tank	To collect the juice after liquidation

L. Concentration and cooking Phase, by twin cylinder able to withstand pressure to adjust the boiling temperature, which is determined by steam water and the cylinder is made of stainless metal thickness of 5 mm.
(programmed with the main control panel)




Dimensions	External diameter 120 cm. high 130 cm. internal diameter 100 cm.
Metal	High-quality stainless-steel quality 304.
Water input	1-inch high-quality stainless-steel quality 304. To clean cylinder.
Steam input	Steam nozzles 2 inches, to enter and exit water steam between the cylinders to heat the liquid and boiled.
Liquid input	2-inch nozzle means to enter the liquid filtered to concentration unit.
Sensors	Heat, amount of water, measure the low bar, measure bar, safety valve.
Water pump	(1) ½ hp and 380 Volts, 50 Cycle. (For washing the boiler after the end of work).
Vacuum pump	A special pump for pumping air (rarefaction) strongly 7.5 hp. and 380 Volts, 50 Cycle.
Steam pump	Steam suction pump 2HP. 380 Volts, 50 Cycle.

Türkiye İş Bankası

Branch: Cumhuriyet / Gaziantep
Account Name: Agha Pack
Swift Code: ISBKTRIS
Account No.: TL. 6318-0034370 (IBAN: TR22 0006 4000 0016 3180 0343 70)
\$. 6318-0004432 (IBAN: TR09 0006 4000 0026 3180 0044 32)
€. 6318-0004446 (IBAN: TR19 0006 4000 0026 3180 0044 46)

Head office: United state of America, **Email:** info@aghapack.com
Regional office: Gaziantep - Türkiye, **Email:** mo.tr@aghapack.com
Sales office: Istanbul - Türkiye, **Email:** sales@aghapack.com
Factory: Gaziantep - Türkiye, **Email:** mo@aghapack.com
Sales GSM: 0090 553 733 3728 **Factory GSM:** 0090 537 286 9818



Vergi No. 0080818425

Agha Pack Since 1989

معدات معالجة وتعليب التمور
Dates processing machines

Makina Gıda Sanayi Ve Ticaret Limited Şirketi
Gaziantep, Sam mahallesi 43 Nolu Sokak No. 3/A Şehitkamil, Turkey
United State Of America, 4445 East gate mall, Suit 200 San Diego, CA 92121
www.aghapack.com



Molasses pump (1)	A special pump to pull strongly molasses, 1HP 380 Volts, 50 Cycle.
Sample output	Stainless steel ¼ inch to take the sample.
Tool Stir	Equipped with metal blades to moving juice.
Motor	5 HP 380 Volts, 70 RPM.
M. Molasses tank, the final product. (programmed with the main control panel)	
Stand	Length 100 cm. x width 100 cm. x height 100 cm.
Metal	High-quality stainless-steel quality 304.
Tank	Diameter 80 cm. x height 110 cm.
N. Semi fill machine, suitable for the packing of liquid food made entirely of stainless steel metal (304). Machine features a high capacity for direct closure after the completion of the filling process.	
(Stage it is not connected to the main control panel).	
Dimensions	2 packs / minute. Each machine.
Speed Pack	High-quality stainless-steel quality 304.
Pack. Size	Manual control up to 1 kilogram.
Quantity	2 machines (only two).
Sockets	2 per machine (the total number of sockets 4)

Line supplements needed in the manufacture of molasses.

1. Main control panel.
 2. Permanent laboratory to determine the density required for material molasses as well as quality control and quality.
 3. Boiler to generate steam card 1 ton per hour temperature of 110 C 4 bar pressure.
- (Item 2 and 3 are supplied by the customer and not the supplier**)

Notice

- ✓ Our machines designed by (**Agha Pack. USA.**) East Gate Mall - suite 200, CA. 92121 USA.
- ✓ Two-year warranty against badness composes.
- ✓ **Dimension maybe changes except capacity.**

Agha Pack

Türkiye İş Bankası

Branch: Cumhuriyet / Gaziantep
Account Name: Agha Pack
Swift Code: ISBKTRIS
Account No.: TL. 6318-0034370 (IBAN: TR22 0006 4000 0016 3180 0343 70)
\$. 6318-0004432 (IBAN: TR09 0006 4000 0026 3180 0044 32)
€. 6318-0004446 (IBAN: TR19 0006 4000 0026 3180 0044 46)

Head office: United state of America, **Email:** info@aghapack.com
Regional office: Gaziantep - Türkiye, **Email:** mo.tr@aghapack.com
Sales office: Istanbul - Türkiye, **Email:** sales@aghapack.com
Factory: Gaziantep - Türkiye, **Email:** mo@aghapack.com
Sales GSM: 0090 553 733 3728 **Factory GSM:** 0090 537 286 9818